

# Fascor®

## FASCOR FASTENERS CATALOGUE 2024



**JOHANNESBURG**  
Number 1 Randport  
Industrial Park, 1 Suzuka Road,  
Gosforth Park, Germiston  
T 011 681 9440 (Admin)  
T 011 681 9100 (Sales)  
E [info@matus.co.za](mailto:info@matus.co.za)  
W [www.matus.co.za](http://www.matus.co.za)

**CAPE TOWN**  
11 Grenville Ave,  
Epping Industria 1,  
Cape Town  
T 021 486 2200  
E [info@matus.co.za](mailto:info@matus.co.za)

**CAPE TOWN**  
Physical Address  
Unit B, Campbell Street,  
Northfield Business Park  
Glen Anil, 4051  
T 031 580 3400  
E [info@matus.co.za](mailto:info@matus.co.za)

**PORT ELIZABETH**  
Physical Address  
118 Burman Road,  
Deal Party, Port Elizabeth  
T 041 486 1345/59  
E [info@matus.co.za](mailto:info@matus.co.za)



**MATUS**  
Hard Working Brands

## CONTENT PAGE

|   |       |
|---|-------|
| Sleeve Anchors   Expansion Bolt   | 01    |
| Bolts+Nuts Cup Square EK   Bolts + Nuts Gutter   Nuts Hex H/T Z/P                                     | 02    |
| Nylon Nuts   Bolts + Nuts Hook   Nail-In Anchor   | 03    |
| Types of Nylon Nuts   Chipboard Screw Square  | 04    |
| Machine Screw CSK   Coach Screws  | 05    |
| Screw Couch   Masonry Nail   Round Wire Nails   Drywall Screw   | 06    |
| Drywall Screw Types   Cheese Head Machines Screw   Roof Screw   El - Toro + Nu-Way                    | 07    |
| Stitching Screw + PVC Washer   Screw TEK HEX Head   TEK Screw Coarse Thread                           | 08    |
| TEK Screw Long Cut Point   Dual Thread Rooting TEK Screw  | 09    |
| Nylon Wall Plug   Topspeed HEX Screw   Set HEX M/S E/G  | 10    |
| Fender Washer   Square Washer   Flat Washer   Bonded Washer   | 11    |
| Pop Rivet   Counter Sunk (CSK) Pop Rivet   Large Flange (L/F) Pop Rivet                               | 12    |
| Eyebolt   Ubolt   Wire Rope Clamp   Hoseclamp   | 13    |
| Dshackle   Zinc SSnap Hook   Hook&Eye Turnbuckle   Wire Management                                    | 14    |
| Bullet Hinge   Modesty Block   Shelf Nails & Studs   Oval Rod Holder                                  | 15    |
| Cabinet   Cranked Cabinet Hinge   Corner Cabinet Hinge   Self Close Hinge   Corner Block   PVC Corner | 16    |
| PVC Magnetic Catch   PVC Bracket   Double Roller Catch   Cabin Hook   Air Vents   Key Tags            | 17    |
| Keyhole Blocker   Hasp&Staple   Towel Rail Bracket   Straight Barrel Bolt   Pad Bolt                  | 18    |
| Necked Barrel Bolt   Ball Chain/Ball Chain Joiner   Chain Twist   Ball Bearing Hinge                  | 19    |
| Tee Hinge   Chain Twist   Butt Hinge   Sinkless Hinge   Tee Brace \ Gate Latch   Corner Brace         | 20    |
| Corner Bracket   Keyhole Block  | 21    |
| Notes   | 22-25 |


## SLEEVE ANCHORS

|         |               |
|---------|---------------|
| FAS2000 | 5X 50 BOX100  |
| FAS2010 | 6X 55 BOX50   |
| FAS2020 | 8X 65 BOX50   |
| FAS2030 | 10X 75 BOX50R |
| FAS2040 | 12X 105 BOX25 |
| FAS2050 | 16X135 BOX10  |
| FAS6695 | M10X50 P8     |
| FAS6700 | M10X60 P8     |
| FAS6705 | M12X60 P2     |
| FAS6710 | M12X75 P2     |
| FAS6715 | M16X65 P2     |
| FAS6680 | M8X40 P15     |
| FAS6685 | M8X65 P10     |
| FAS6680 | M8X40 P5      |
| FAS6690 | M8X90 P5      |

## SLEEVE ANCHORS

Sleeve anchors are extremely versatile fixings that can be used for light or heavy-duty applications in concrete, brick or stone. Sleeve anchors have an easy-to-use mechanism whereby the bolt is tightened, and the expansion sleeve expands against the base material to create a secure fixing. Anchor is a torque-controlled expansion anchor comprising a split sleeve and a bolt incorporating an expander wedge. It is a through fixing, thus allowing the hole in the substrate to be drilled through the pre-positioned fixture, eliminating the need for marking out, ensuring fast and simple installation. It is ideal for general purpose applications in a wide variety of substrates, including concrete, brickwork and blockwork.

- Can be used to fix medium to heavy weight objects to walls and floors.
- Anchor is placed through the object and into the wall, hence it called a push-through installation.
- When the nut is tightened, the cone at the opposite end is pulled into the sleeve leading to its expansion inside the hole.
- The same size hole should be drilled in the object and the surface it's mounted to.
- Sleeve anchors are suitable for push-through installations.
- The yellow passivation coating makes the anchor resistant against corrosion.



**Step 1**

Drill same size hole in both materials



**Step 2**

Align and insert



**Step 3**

Tighten bolt



## EXPANSION BOLT

- Expansion bolts can be used to secure heavy objects to walls or floors.
- Can handle vertical and horizontal loads.
- By tightening the bolt, the nut on the opposite end pulls into the shell expanding it outward and wedging it inside the hole in the wall or floor.
- Yellow passivation coating makes Expansion bolts rust resistant.
- Requires a spanner or socket wrench to fasten or undo the bolt.
- Ideal for heavy duty fastening of steel and wood structures walls and floors.
- Expansion bolts are fasteners used in masonry materials that expand once inserted into a predrilled hole in the masonry. The expansion of the anchor is accomplished in different ways and the anchors are designed for different applications.

## EXPANSION BOLT



|         |           |
|---------|-----------|
| FAS6670 | M10X75 P2 |
| FAS6675 | M12X90 P2 |
| FAS6655 | M5X50 P15 |
| FAS6660 | M6X50 P10 |
| FAS6665 | M8X65 P5  |



## BOLTS+NUTS CUP SQUARE E/G



|         |           |
|---------|-----------|
| FAS6925 | M10X70 P4 |
| FAS6930 | M12X75 P2 |
| FAS6920 | M5X50 P10 |

## BOLTS+NUTS CUP SQUARE E/G

- A bolt looks like a screw but has much finer threads and is used to fasten objects together. This can be achieved by either fastening into the last object by means of a threaded hole or pushing the bolt through all the objects and compressing them together with a nut.
- Both the bolt and the nut grip the materials being fastened, creating a bolt joint, with the nut also preventing axial movement. The effect of the bolt joint comes down to the axial clamping force provided by the nut and the shank of the bolt : acts as a rod that presses the joint against sideways shear forces.
- This is why so many bolt shanks are threadless – it makes for a stronger rod.

## BOLTS+NUTS GUTTER



|         |           |
|---------|-----------|
| FAS6195 | M6X12 P30 |
| FAS6200 | M6X16 P30 |
| FAS6205 | M6X20 P30 |
| FAS6210 | M6X25 P30 |
| FAS6215 | M6X30 P30 |
| FAS6220 | M6X40 P20 |
| FAS6225 | M6X50 P20 |
| FAS6230 | M6X60 P20 |
| FAS6235 | M6X75 P15 |

- Used during the installation of zinc gutters.
- The gutter lies inside the U-shaped bracket, which is fastened to the rafters, and the gutter gutter bolt is fed through the bracket and the gutter where after is secured with a square nut.

## NUTS HEX H/T Z/P



|         |         |
|---------|---------|
| FAS6810 | M10 P30 |
| FAS6815 | M12 P20 |
| FAS6820 | M16 P10 |
| FAS6825 | M8 P50  |

- A nut is a type of fastener that has a threaded hole and is used together with bolts to fasten a stack of parts together by means of a compression force.
- Fastener that can be used for a variety of fastening tasks that involve set screws or bolts.
- Used on the opposite end of a bolt (or set screw) to compress a stack of parts together.
- Zinc plated to increase rust resistance.
- Hex shaped to allow fastening and loosening with a spanner or socket.

## NYLON NUTS



|         |         |
|---------|---------|
| FAS6850 | M16 P10 |
| FAS6840 | M10 P20 |
| FAS6845 | M12 P20 |
| FAS6830 | M6 P100 |
| FAS6835 | M8 P25  |

- Hex nut, with a collar which holds a nylon insert, for the purpose of increasing locking force and preventing the nut from coming loose.
- Perfect for outdoor use as the zinc plating makes these nuts rust resistant.
- Nylon withstands weathering extremely well.
- Used in areas where vibration occurs, such as securing lawn mower wheels to a lawn mower.
- Exercise caution when re-using Nyloc nuts - the thread from the screws or bolts cut into the nylon and can decrease locking force.

## BOLTS + NUTS HOOK



|         |           |
|---------|-----------|
| FAS6240 | M6X50 P20 |
| FAS6245 | M6X65 P20 |
| FAS6250 | M6X80 P10 |
| FAS6255 | M6X80 P5  |
| FAS6260 | M6X95 P5  |

- Also known as J-bolts.
- Often used in roofing applications where the hook part is hooked onto the support structure below the roof sheet
- The straight part then goes through a hole in the roof sheeting where after it's fastened with a nut.
- Can be used to hang light objects, such as planters, onto metal structures.


## NAIL-IN ANCHOR



|         |                  |
|---------|------------------|
| FAS2100 | NYLON 5X36 100PC |
| FAS2110 | NYLON 5X45 100PC |
| FAS2120 | NYLON 6X35 100PC |
| FAS2130 | NYLON 6X55 100PC |
| FAS2140 | NYLON 6X70 100PC |
| FAS2170 | NYLON 8X100 50PC |
| FAS2180 | NYLON 8X120 50PC |
| FAS2150 | NYLON 8X60 50PC  |
| FAS2160 | NYLON 8X80 50PC  |
| FAS6615 | GREY M5X36 P25   |
| FAS6620 | GREY M5X45 P25   |
| FAS6625 | GREY M6X35 P25   |
| FAS6630 | GREY M6X42 P25   |
| FAS6635 | GREY M6X55 P15   |
| FAS6640 | GREY M6X70 P15   |
| FAS6645 | GREY M6X70 P6    |
| FAS6650 | GREY M8X57 P6    |

## NAIL-IN ANCHOR

- Anchor is placed through the object and into the wall where after the nail is driven in all the way to enable expansion of the sleeve inside the hole.
- The same size hole should be drilled in the object and the surface it's mounted to.

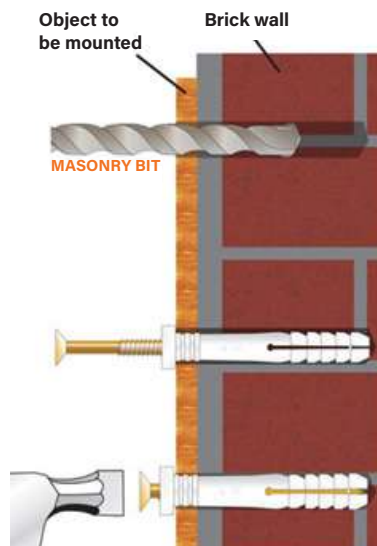

### Useful Information

- Can be unscrewed with pozi bit to remove.
- Can be screwed in when working on tiles or other fragile materials.

## Types Available

### Plastic Nail-In Anchor



- Easily identified by its white sleeve.
- Suitable for interior applications only.
- Available in a rimmed version, to provide extra grip, as well as a tru-fix version.

### Nylon Nail-In Anchor



- Easily identified by its grey sleeve.
- Suitable for exterior applications.
- Nylon can withstand the onslaught from the elements.
- Countersunk head ensures a smooth finish.

## Simple Installation

### Step 1



#### Drill same-size hole in wall and fitting

If using a sharp masonry bit, you can drill through the material to be mounted and into the masonry in one step!

### Step 2



#### Place Nail-In Anchor through the aligned holes

There is no need to remove the nail from the sleeve, simply place the sleeve with the nail in place through both the hole in the material to be mounted and into the wall.

### Step 3



#### Hammer home

## CHIPBOARD SCREW SQUARE



|         |           |
|---------|-----------|
| FAS6435 | 10X60 P40 |
| FAS6440 | 10X75 P40 |
| FAS6385 | 6X25 P100 |
| FAS6390 | 6X30 P100 |
| FAS6395 | 6X40 P70  |
| FAS6400 | 6X50 P50  |
| FAS6405 | 8X16 P100 |
| FAS6410 | 8X25 P100 |
| FAS6415 | 8X30 P60  |
| FAS6420 | 8X50 P50  |
| FAS6430 | 8X75 P50  |

## CHIPBOARD SCREW SQUARE

- As the name suggests, these screws can be used when doing general DIY work with chipboard and other softer types of woods.
- Unlike the Cut screws, they do not have the Type 17 cutting point and, therefore, require pilot holes, drilled 2mm smaller than the size of screw used.
- A Pozi screwdriver bit is then required to drive the screws home, but care must be taken as they have a tendency to slip and strip.
- These screws are available in 2 finishes, namely zinc plated and yellow passivation corrosion resistant coating.

Smooth shank  
yellow passivated



Used when fixing wood to wood. The smooth shank part of the screw allows it to spin in the top piece tightly against the top piece, thus leaving no gap between the two. The smooth shank also prevents the screw head from pulling into the top piece of wood while it is driven into the bottom piece.

Full thread  
yellow passivated



Used when fixing metal to wood. Unlike smooth shank screws, when driving in full thread screws, the top material cannot move along the shank. Instead, it is held in place by the threads.

Full thread  
zinc plated



Perfect for fastening hinges to kitchen cupboards and doors as the zinc plating helps the screw blend in with the hinge.

## MACHINE SCREW CSK

- Machine screws are uniformly threaded screws, meaning they maintain the exact same diameter throughout the entire length of the threaded section of the fastener, unlike wood or chipboard screws which have tapered threads.
- Machine screws can be used to fasten components together by means of through holes and secured with a nut at the other end. But they can also be used to fasten components together by passing the machine screw through the parts and then threading it into the rearmost component.
- As the name suggests, these screws can be used to fasten components in machines, tools, appliances and electronic devices.

### Types Available



#### Countersunk Machine Screw

The countersunk machine screw has a flat countersunk head for application where a flush finish is required.



#### Cheesehead Machine Screw

Features a relatively tall, rounded, head with cylindrical sides as well as deep slots in the head to allow increased driving power.

## COACH SCREWS


Coach Screws can be used for heavy duty construction work where you want to fix wood or metal to wood. They are designed with a hexagonal head and, therefore, require a wrench or socket spanner to be tightened or unscrewed. Manufactured from mild steel, the galvanizing coating gives it extra protection against rust.

These screws have broad heads, preventing them from pulling into the wood and enabling them to compress the substrates together, making them a good choice for joints that see heavy use.



#### ① Useful Information

- Tighten the coach screw with the correct size spanner.
- Coach screws are made from mild steel, do **NOT** overtighten as they **WILL** break



#### Pilot holes

All Coach Screws require a pilot hole before they're screwed into place, no matter what type of wood you are working with. Drill the pilot hole **2mm smaller** than the size Coach Screw used.

Coach screws can also be used in conjunction with wall plugs for anchoring heavy objects, such as TV arm or satellite dishes, into masonry or concrete.

It is, however, important to note that Coach Screws should never be over tightened as this could cause the screw to break off.



## SCREW COACH



|         |                 |
|---------|-----------------|
| FAS6940 | +PLUG M10X60 P5 |
| FAS6935 | +PLUG M6X50 P5  |
| FAS6490 | M10X40 P12      |
| FAS6495 | M10X50 P10      |
| FAS6500 | M10X60 P10      |
| FAS6505 | M10X75 P2       |
| FAS6510 | M10X75 P5       |
| FAS6515 | M10X90 P3       |
| FAS6520 | M12X60 P5       |
| FAS6445 | M6X40 P30       |
| FAS6450 | M6X50 P30       |
| FAS6455 | M6X60 P30       |
| FAS6460 | M6X75 P20       |
| FAS6465 | M8X40 P20       |
| FAS6470 | M8X50 P20       |
| FAS6475 | M8X60 P15       |
| FAS6480 | M8X75 P10       |
| FAS6485 | M8X90 P5        |
| FAS6945 | +PLUG M10X75 P3 |
| FAS6950 | +PLUG M12X60 P3 |

- Coach Screw & Plug is ideal for heavy duty construction.
- Can be used for heavy duty work, for example, putting up a TV arm, satellite dish or antenna.
- Have a hexagonal head and, therefore, require a wrench or socket spanner to be tightened or unscrewed.

## MACHINE COUNTER SUNK HEAD



|         |           |
|---------|-----------|
| FAS6570 | M4X50 P30 |
| FAS6575 | M5X30 P30 |
| FAS6580 | M5X50 P30 |
| FAS6585 | M5X75 P25 |
| FAS6590 | M6X20 P30 |
| FAS6595 | M6X30 P30 |
| FAS6600 | M6X50 P25 |
| FAS6605 | M8X20 P25 |
| FAS6610 | M8X50 P15 |

## ROOF SCREW EL-TORO+NU-WAY



FAS6190 4.5X90MM P5

- Roofing screws have a self-drilling point and are generally used where firmer tightening is required.
- A good example is IBR or corrugated sheets are applied to timber trusses, used with a bonded washer to stop water leaking through the hole.
- Roofing screws are used in combination with bonded washers to prevent water leaks.
- El Toro combination roofing screw with Nu-Way seal; the groove under the screw head gives perfect sealing and the concentric seal ring stops leaks.
- The tapered seal plugs hole completely, and the galvanized washer ensures overall protection.

## CHEESE HEAD MACHINE SCREW



|         |           |
|---------|-----------|
| FAS6525 | M4X50 P30 |
| FAS6530 | M5X25 P30 |
| FAS6535 | M5X40 P30 |
| FAS6540 | M5X50 P30 |
| FAS6545 | M5X75 P30 |
| FAS6550 | M6X16 P30 |
| FAS6555 | M6X25 P30 |
| FAS6560 | M6X50 P30 |
| FAS6565 | M6X75 P10 |


- Machine screws are uniformly threaded screws, meaning they maintain the exact same diameter throughout the entire length of the threaded section of the fastener, unlike wood or chipboard screws which have tapered threads.
- Machine screws can be used to fasten components together by means of through holes and secured with a nut at the other end. But they can also be used to fasten components together by passing the machine screw through the parts and then threading it into the rearmost component.
- As the name suggests, these screws can be used to fasten components in machines, tools, appliances and electronic devices.



## DRYWALL SCREW

- Drywall screws, with their extremely sharp points and threads, are specifically designed to secure drywall to a substrate such as wood or metal studs. It's these sharp points and threads that enable the lightning-fast insertion of the screws into drywall and its support structure.
- The screw head design, known as bugle heads, enable drywall screws to embed themselves in the drywall, resulting in a flush or recessed finish so that it can later be filled with a filling substance and then painted over to give a smooth finish.
- For best results, drywall screws should be inserted with an electric screwdriver accompanied by a drywall bit. The drywall bit will ensure the screw sits at the correct depth so that it can be filled and painted over.
- These screws can also be used for woodworking projects as their coarse thread is perfect when you are working with soft wood or man-made boards such as chipboard, Supawood or plywood.

### Types Available




#### Drywall Screw Coarse Thread

The drywall screws with coarse thread can be used to secure drywall to a wood substrate, such as studs or roof bracing, as strong holding power is required.



#### Drywall Screw Fine Thread

The versions of the screw, are preferred for, and can be used to fasten drywall to metal studs as they will easily cut into the metal and provide better holding power in the thin metal, as opposed to the coarse thread versions.



#### Drywall Screw Coarse Thread

With its type 3 self-drilling point, these drywall screws are perfect when you are working with metal studs and results in the effortless insertion of the screws.



## STITCHING SCREW + PVC WASHER



FAS6125

14X22 P40

## STITCHING SCREW + PVC WASHER

- Stitching Screws are a multipurpose screw used for fixing into timber or light gauge steel.
- Stitching Screws are the most effective way to secure your lap joint and flashings or trims to your roofing sheets shear forces.
- Self-tapping screws that tighten sheet to sheet delivering a secure and water tight finish.
- Each fixing has a bonded washer which will seal the fixing ensuring it is water tight.

## SCREW TEK HEX HEAD

These screws with their Type 5 self-drilling point drill their own pilot holes and then tap threads to combine two pieces of metal. Drilling and fastening can be done in one single step with a drill machine combined with an 8mm nut setter.

## SCREW TEK HEX HEAD



FAS6010

12X20 P40

FAS6015

12X25 P40

FAS6020

12X30 P40

FAS6025

12X40 P40

FAS6030

12X50 P40

FAS6035

12X57 P25

FAS6040

12X65 P25

FAS6045


12X75 P20

FAS6050

12X90 P15

FAS6055

8X38 P30



## TEK SCREW COARSE THREAD

- Can be used to secure IBR or corrugated sheeting to metal roof structures, for example, when building carports.
- The split thread version drills through the IBR sheeting and at the point where it starts to drill through the metal structure below; the break in thread allows it to spin in the sheeting while it drills into the structure.
- Small top section of thread keeps the sheeting intact and prevents movement.

## TEK SCREW LONG CUT POINT

- Can be used when fastening sheet metal to thicker pieces of metal.
- The longer cutting point helps to cut into the thicker metal.
- Fine thread screw is ideal for thicker metals ranging between 2mm - 12mm.
- Yellow passivation coating makes these screws rust resistant.



## DUAL THREAD ROOFING TEK SCREW



Coarse thread pulls roofing taugt and prevents it from collapsing down the screw shaft under pressure.



- Can be used to secure IBR or corrugated sheeting to metal roof structures, for example, when building carports.
- The split thread version drills through the IBR sheeting and at the point where it starts to drill through the metal structure below; the break in thread allows it to spin in the sheeting while it drills into the structure.
- Small top section of thread keeps the sheeting intact and prevents movement.

## TOPSPEED HEX SCREW



|         |            |
|---------|------------|
| FAS6060 | 14X20 P40  |
| FAS6065 | 1 4X25 P40 |
| FAS6070 | 14X50 P20  |
| FAS6075 | 4X64 P20   |
| FAS6080 | 4X80 P40   |
| FAS6085 | 14X90 P10  |

## TOPSPEED HEX SCREW



|         |           |
|---------|-----------|
| FAS6090 | 12X28 P40 |
| FAS6095 | 12X50 P20 |
| FAS6100 | 12X65 P20 |
| FAS6105 | 12X75 P20 |
| FAS6110 | 12X90 P10 |
| FAS6115 | 14X65 P15 |
| FAS6120 | 14X90 P5  |

- These fasteners are suitable for securing corrugated or IBR roof sheeting into soft and hard wood. Used in conjunction with bonded washers, this installation will ensure a water tight seal, thus preventing any water ingress.
- The Top speed screws feature a Type 17 cutting point which makes a one-step installation process possible; meaning (depending on the type of wood used) no pre-drilling or pilot holes are required.
- The yellow passivation coating means the screws are protected from rust - making them perfect for outdoor applications.
- If old roofing nails are leading to problems, such as a leaking roof, don't despair. The Top speed screws feature deep and coarse threads allowing you to simply remove the old roofing nails and then securing the roof sheeting with the Top speed screw and bonded washer combination.

### **i Useful Information**

The 10mm nut setter is required to drive in the Top speed screws. Simply place the nut setter in an electric drill and you'll be able to effortlessly drive in these screws.

## NYLON WALL PLUG



|         |         |
|---------|---------|
| FAS6720 | M8 P30  |
| FAS6730 | M12 P10 |
| FAS6735 | M14 P5  |
| FAS6720 | M8 P30  |

- For fixing light to heavy weight objects to brick walls.
- A hole the diameter of the Wall plug is required in the wall.
- Wall plugs expand when the screw is driven in.
- Once expanded, the Wall plug holds onto the inside of the hole by means of friction.

## SETSCREW HEX M/S E/G



|         |            |
|---------|------------|
| FAS6890 | M8X50 P15  |
| FAS6895 | M8X60 P10  |
| FAS6900 | M10X25 P20 |
| FAS6905 | M10X30 P10 |
| FAS6910 | M10X40 P8  |
| FAS6915 | M10X50 P6  |
| FAS6855 | M6X25 P30  |
| FAS6860 | M6X30 P25  |
| FAS6865 | M6X40 P20  |
| FAS6870 | M6X50 P20  |
| FAS6875 | M8X25 P15  |
| FAS6880 | M8X30 P15  |
| FAS6885 | M8X40 P15  |

- The Hex Set Screw is a medium to high carbon steel, heat treated and hardened.
- Set Screws are used in machinery, fabrication and construction applications.
- The Hex Set Screw is designed to fit a spanner or wrench allowing you to tighten the screw to your exact specifications.

## FENDER WASHER ZP



|         |            |
|---------|------------|
| FAS6755 | M12X45 P15 |
| FAS6760 | M16X50 P10 |
| FAS6740 | M6X32 P30  |
| FAS6745 | M8X38 P30  |
| FAS6750 | M10X45 P15 |

- A fender washer is a flat washer with a larger outer diameter in proportion to its centre hole.
- They are made from a thinner gauge metal than most flat washers and are designed to spread the load on thin sheet metal. Interestingly, they are named after their use on automobile fenders.

## SQUARE WASHER ZP



|         |                  |
|---------|------------------|
| FAS6795 | 10X30X30X2.5 P15 |
| FAS6800 | 12X37X37X4 P10   |
| FAS6805 | 16X50X50X3 P5    |

- Square Hole Washers are wider and thicker than most round washers which helps distribute heavy loads.
- The square shape prevents rotation when placed within a square recess.



## FLAT WASHER ZP



|         |                    |
|---------|--------------------|
| FAS6785 | M10X30X2.5 P15     |
| FAS6790 | M10X40X3.0 P10     |
| FAS6770 | (DIN125AJ M10 P50) |
| FAS6775 | (DIN125A) M12 P30  |
| FAS6780 | (DIN125A) M16 P15  |
| FAS6765 | (DIN125A) M8 P60   |
| FASW3   | W3 P/100           |
| FASW4   | W4 P/100           |
| FASW5   | W5 P/100           |

- Also known as plain washers, their purpose is to distribute the fastener's load while reducing heat and friction during the tightening process.
- They can also be used as spacers, as is common in industrial and domestic applications. Flat washers are also called on to provide electrical insulation.
- Zinc plated.

## BONDED WASHER



|         |               |
|---------|---------------|
| FAS6000 | EPDM 6X19 P40 |
| FAS6005 | EPDM 6X26 P40 |

- Metal washers bonded with rubber.
- Used during roof installations because the rubber helps prevent leaks.
- The rubber is bonded to the underside of the metal washer.
- Once installed, rubber seal is compressed onto the roof sheeting thus creating a water-tight seal.

## POP RIVET



|            |                   |
|------------|-------------------|
| FAS3206    | 3.2X06MM P/100    |
| FAS3208    | 3.2X08MM P/100    |
| FAS3210    | 3.2X10MM P/100    |
| FAS3210LF  | 3.2X10MM P/100    |
| FAS3212    | 3.2X12MM P/100    |
| FAS3212LF  | 3.2X12MM P/100    |
| FAS3215    | 3.2X15MM P/100    |
| FAS3218    | 3.2X18MM P/100    |
| FAS4006    | 4.0X06MM P/100    |
| FAS4008    | 4.0X08MM P/100    |
| FAS4010    | 4.0X10MM P/100    |
| FAS4010CSK | 4.0X 10MM P / 100 |
| FAS4012    | 4.0X12MM P/100    |
| FAS4012CSK | 4.0X12MM P /100   |
| FAS4015    | 4.0X15MM P/100    |
| FAS4015CSK | 4.0X15MM P /100   |
| FAS4015LF  | 4.0X15MM P/100    |
| FAS4018    | 4.0X18MM P/100    |
| FAS4806    | 4.8X06MM P/100    |
| FAS4808    | 4.8X08MM P/100    |
| FAS4810    | 4.8X10MM P/100    |
| FAS4810CSK | 4.8X 10MM P / 100 |
| FAS4810LF  | 4.8X10MM P/100    |
| FAS4812    | 4.8X12MM P/100    |
| FAS4812CSK | 4.8X12MM P /100   |
| FAS4812LE  | 4.8X12MM P/100    |
| FAS4815    | 4.8X15MM P/100    |
| FAS4815LF  | 4.8X15MM P/100    |
| FAS4818    | 4.8X18MM P/100    |
| FAS4818LF  | 4.8X18MM P/100    |
| FAS4821    | 4.8X21MM P/100    |
| FAS4821LF  | 4.8X21MM P/100    |
| FAS53206   | 3.2X0.6MM P/500   |
| FAS54821   | 4.8X21MM P/500    |

- Also known as a blind rivet, a pop rivet is a strong, and lightweight fastener used to join two or more pieces of material using a pre-drilled hole where access to the backside of a workpiece is not possible.
  - Generally, the pop rivet is divided into two parts namely; rivet body and mandrel. The rivet body is also called the hat, and the mandrel is also called a stem.
  - **Benefits;** light weighted, affordable in price, durable in nature and easy to install.
  - **Application;** Requirements - Riveter and pre-drilled hole. Used for attaching number plates, woodworking industry and industrial application.
  - Also used for installing hinges and hasps or staples onto metal frames.
- LF = large flange  
CSK = counter sunk





## COUNTERSUNK (CSK) POP RIVET

- A countersunk rivet, also known as a flat rivet, is used in countersunk holes and once set, a smooth and seamless finish.
- They are used in tracks where the head will not protrude into sliding tracks or rollers.
- Uses; installing door hinges, used in automobiles, furniture manufacturing, etc.



## LARGE FLANGE (L/F) POP RIVET

- Large flange pop rivets, also known as oversize rivets, have a larger washer on the hat than standard pop rivets.
- The larger washer allows the pressure of the rivet to be spread out over a greater surface area.
- Commonly used on softer materials where installation can damage the material or pull-through is likely to occur, e.g. fixing wood or plastic to metal.
- Uses; woodworking and home construction.

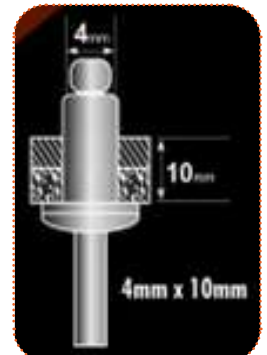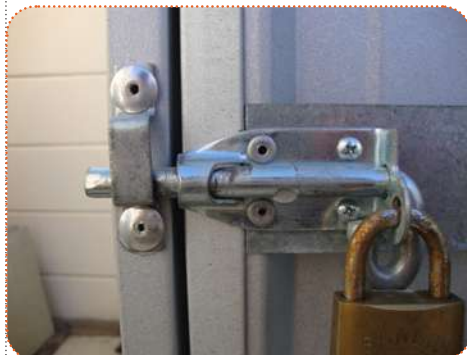

## EYEBOLT GA/VANISED



|         |           |
|---------|-----------|
| FAS8000 | 5X50MM P2 |
| FAS8005 | 5X60MM P2 |
| FAS8010 | 5X75MM P2 |
| FAS8015 | 6X64MM P2 |
| FAS8020 | 6X75MM P2 |
| FAS8025 | 8X75MM P2 |

- An eye bolt is a bolt with a loop at one end. They are used to firmly attach a securing eye to a structure, so that ropes or cables may then be tied to it.
- Uses; for variety of rigging, anchoring, pulling and pushing applications.

## UBOLT



|         |           |
|---------|-----------|
| FAS8030 | 5X30MM P2 |
| FAS8035 | 6X30MM P2 |
| FAS8040 | 8X40MM P2 |
| FAS8045 | 8X45MM P2 |
| FAS8050 | 8X50MM P2 |
| FAS8055 | 8X65MM P2 |

- A u-shaped curved bolt with threads on each end, used as support in the piping and pipeline industry.
- Used to avoid pipe movement and breakage.
- Easy to use.
- Galvanized finish.

## WIRE ROPE CLAMP



|         |           |
|---------|-----------|
| FAS8060 | 3MM P/2   |
| FAS8065 | 5MM P/2   |
| FAS8070 | 6.5MM P/2 |
| FAS8075 | 8MM P/2   |
| FAS8080 | 10MM P/2  |
| FAS8085 | 13MM P/2  |
| FAS8090 | 16MM P/2  |

- A Wire rope clamp, also known as a wire rope clip is widely used for making eye-loop connections or join two wire rope cable ends together.
- The traditional styles of wire rope clips usually have three components: a U-shaped bolt, a forged or cast iron saddle, and two nuts.

## HOSECLAMP MILD STEEL



|         |                    |
|---------|--------------------|
| FAS8200 | GM4 6-17MM P/2     |
| FAS8205 | GM6 6-22MM P/2     |
| FAS8210 | GM7/10 15-27MM P/2 |
| FAS8215 | GS8/10 14-27MM P/2 |
| FAS8220 | GS12 14-32MM P/2   |
| FAS8225 | GS16 17-38MM P/2   |
| FAS8230 | GS20 19-44MM P/2   |
| FAS8235 | GS24 25-51MM P/1   |
| FAS8240 | GS28 32-57MM P/1   |
| FAS8245 | GS32 38-63MM P/1   |
| FAS8250 | GS36 44-70MM P/1   |
| FAS8255 | GS40 51-76MM P/1   |
| FAS8260 | GS44 57-82MM P/1   |

- A hose clamp is used to fix and secure a hose into a fitting such as a barb or nipple.
- Easy to use when it comes to attaching hoses and pipes easily – sturdy and durable.
- Versatile; can be used in place of screws, nails, or tacks when other fasteners aren't suitable.

## DSHACKLE



|         |          |
|---------|----------|
| FAS8095 | 6.5MM P2 |
| FAS8100 | 8MM P2   |
| FAS8105 | 10MM P2  |
| FAS8110 | 13MM P2  |

- This is the most common type of shackle, D-shaped with a bolt or clevis pin across the opening for closure through the threaded section.
- They are primarily used to connect items such as cables or chains.

## ZINC SNAP HOOK



|         |            |
|---------|------------|
| FAS8120 | 5X50MM P/2 |
| FAS8125 | 6X60MM P/2 |
| FAS8130 | 7X70MM P/2 |
| FAS8135 | 8X80MM P/2 |

- Snap hooks are hooks with spring-loaded closing bars. They're useful in a variety of rigging applications and come in a wide range of sizes and capacities.
- Compared to other types of hooks, the advantage of snap hooks is that they allow for speedy loading and unloading while still maintaining a high degree of strength and dependability..
- Zinc plated iron rod material.
- Useful for quick connection of rope, chain, wire cable etc.
- Use with shackles, eye bolts, turnbuckles.

## HOOK&EYE TURNBUCKLE



|         |         |
|---------|---------|
| FAS8140 | 5MM P/2 |
| FAS8145 | 6MM P/2 |
| FAS8150 | 8MM P/2 |

- Hook and eye turnbuckle is used for tensioning, rope, cable, wire. Eye on one end, hook on the other end.
- Design allows for fast removal, when used for temporary barrier purposes.


## WIRE MANAGEMENT



|          |           |
|----------|-----------|
| FAS65661 | BLACK P/1 |
| FAS65678 | BROWN P/1 |
| FAS65685 | GREY P/1  |
| FAS65692 | OAK P/1   |
| FAS65708 | WHITE P/1 |

- Wire management will help to protect wires, cords and cables for your computer and electronic equipment.
- They protect the wires and cables from damage and debris and usually come in a variety of colours and sizes to match the decor of the office or home.


## BULLET HINGE



|         |                |
|---------|----------------|
| FAS8265 | 50MMX10MM P/2  |
| FAS8270 | 70MMX12MM P/2  |
| FAS8275 | 70MMX16MM P/2  |
| FAS8280 | 70MMX20MM P/2  |
| FAS8285 | 100MMX16MM P2  |
| FAS8290 | 100MMX20 P/2   |
| FAS8295 | 100MMX25MM P/1 |
| FAS8299 | 120MMX30MM P1  |

- Also referred to as weld on hinges, lift off hinges, and barrel hinges, bullet hinges provide users an attractive yet compact and strong method to attach metal doors with metal frames.
- These hinges come in quite handy for enclosures, gates, tool cabinets, agricultural purposes, electrical purposes, and are perfect for several other industrial as well as residential applications.
- They are available in various sizes to make sure that the user can fit them according to their requirements and convenience.

## MODESTY BLOCK



|          |           |
|----------|-----------|
| FAS65845 | BROWN P10 |
| FAS66538 | WHITE P10 |

- Modesty blocks are for making easy joint fixing of cabinet panels.
- Knock-down fittings are those that can be put together easily, normally using only a screw driver and other basic tools.
- They are temporary joints although many are used to permanently join items such as cabinets and other pieces of furniture that are purchased in a flat pack.
- Available in brown and white.
- Screws not included in pack.

## SHELF NAILS & STUDS



|          |            |
|----------|------------|
| FAS65579 | WHITE P/40 |
| FAS65630 | CLEAR P/40 |
| FAS65647 | BROWN P/40 |
| FAS65654 | WHITE P/40 |

- Affixing shelf nails are easy to install, just turn the plain section upwards and fix it with iron nails. With a white or clear nails, it is suitable for any style and colour of cabinets.
- Made of high-quality environmentally friendly plastic material, which is finely made, not easy to loosen, safe and reliable, and has a long service life.
- Ideal for fixing brackets, glass shelves, cabinet and wardrobe support.
- Sturdy and stable.
- Available in brown, white and clear.

## OVAL ROD HOLDER



|          |                 |
|----------|-----------------|
| FAS65586 | LARGE P/2       |
| FAS65777 | OPEN WHITE P/10 |

- Easy to install; you only need to prepare the screws and screwdrivers; Place the screws into the pre-made holes in the support and fix them in the appropriate position of the wardrobe with a screwdriver, one on each side. Note that the brackets on both sides should be symmetrical.
- Made from quality plastic material, sturdy and wear resistant, reliable and reusable, and not easy to deform or break, can be used for a long period of time.
- Screws not included in pack.



## CABINET HINGE



|          |                     |
|----------|---------------------|
| FAS65197 | STRAIGHT 110DEG P/2 |
| FAS65203 | STRAIGHT 110DEG P/1 |
| FAS65234 | INSET 110DEG P/1    |
| FAS65241 | 180DEG P/1          |
| FAS65289 | STRAIGHT CLIPON P/1 |
| FAS65305 | SPARE DOWELS P/4    |
| FAS65302 | M6X60 P20           |

- Opening angle: 110 Degree.
- Includes installation screws.
- Full Overlay Door.
- Soft Close System.
- Easy to install.

## CRANKED CABINET HINGE



|          |            |
|----------|------------|
| FAS65210 | 110DEG P/2 |
| FAS65227 | 110DEG P/1 |
| FAS65296 | 110DEG P/1 |

- Opening angle: 110 Degree.
- Includes installation screws.
- Full Overlay Door.
- Soft Close System.
- Easy to install.

## CORNER CABINET HINGE



FAS65302 P/2

- Easy to install & sturdy.
- Includes installation screws.

## SELF CLOSE HINGE



|          |                |
|----------|----------------|
| FAS65333 | ANT/COPPER P/2 |
| FAS65340 | B/BRASS P/2    |
| FAS65375 | ANT/BRASS P/2  |
| FAS65364 | WHITE P/2      |

- A self-closing hinge is a type of hinge designed to pull a door shut after it has been opened and released.
- Installation; commonly on kitchen cabinets, bathrooms, some doors, and gates.
- Easy to install and adjust.

## CORNER BLOCK



|          |           |
|----------|-----------|
| FAS65715 | BROWN P/6 |
| FAS65722 | OAK P/6   |
| FAS65739 | WHITE P/6 |

- Made of plastic material.
- Lightweight and non-conductive.
- Durable to use.
- Multiple applications, e.g.: window, door, shelves, etc.
- Screws not included in pack.

## PVC CORNER



|          |                 |
|----------|-----------------|
| FAS64626 | SMALL 17MM P/10 |
| FAS64596 | 44X50 P/2       |

- Made of plastic material.
- Serve more as structural supports to strengthen corner joints against compressive failure.
- Durable to use.
- Multiple applications, e.g.: window, door, shelves, etc.
- Screws not included in pack.
- Lightweight and non-conductive.

## PVC MAGNETIC CATCH



FAS65548 BROWN P/2  
FAS65555 WHITE P/2

- Made of plastic material.
- Ideal of cabinet door, furniture door, pantry door, french doors and closet door.
- Easy to install.

## PVC FASCIA BRACKET



FAS64589 90X45 P/1

- Thick designed plate and right angle braced, more sturdy and durable to use.
- Serve more as structural supports to strengthen corner joints against compressive failure.
- An important corner joint fastener to make furniture parts stay firm, ideal for repairing or strengthening right angle corner joints of drawers, windows, frames, boxes, chest, cabinet etc.
- Non-toxic and harmless, safe and corrosion-resistant.

## DOUBLE ROLLER CATCH



FAS65623 P/2

- The double roller catch with spring is a frequently used cabinet catch.
- The plastic rollers provide a firm grip.
- Easy to install and easy to use.
- Screws are included in pack.
- Can be installed on cabinets, cupboards, drawers, doors, etc.

## CABIN HOOK



FAS9070 BRASS 150MM P/2  
FAS9065 BRASS 100MM P/1  
FAS9075 CHROME 100MM P/2  
FAS9080 CHROME 150MM P/6

- Suitable for multiple door applications.  
\*\*Includes screws (need to confirm).
- Design allows for smooth operation after installation.
- Reduction in noise/friction in terms of opening and closing action after installation.
- Finish variations; brass and chrome.

## AIR VENTS



FAS65753 75MM ROUND P/2



- Circular mesh allows wind to easily flow into the living space.
- Not easily blocked.
- Easy to install and can be directly installed with holes of the same diameter.
- Suitable for kitchen cabinets, wardrobes, decorative cabinets and offices, conference rooms, concert halls.

## KEY TAGS



FAS9015 6X COLOURS P/6

- Assorted key tags.
- Removable insert card with plastic cover.
- Keep track of all of your keys.
- Red, Orange/Yellow, Black, Green, Blue.
- Ideal for estate agents/letting agents.

## KEYHOLE BLOCKER



FAS9020 BRASS P/1

- This keyhole blocker fits all standard mortice locks.
- This device allows the user to block almost any standard size (5.5g) mortice lock.
- Simply fits and locks inside the mortice lock preventing anybody who may have a key for that lock from entering the premises.

## TOWEL RAIL BRACKET



FAS9500 19MM P/2

- Features a chrome finish that resists corrosion and compliments almost any bathroom decor.
- Quick and easy installation.
- Includes fixing screws.

## STRAIGHT BARREL BOLT



FAS9345 CP 50MM P/1  
 FAS9350 CP 75MM P/1  
 FAS9355 CP 100MM P/1  
 FAS9360 BP 50MM P/1  
 FAS9365 BP 75MM P/1  
 FAS9370 BP 100MM P/1

- Easy to install, you can use in vertical, horizontal, left or right hand applications.
- Sturdy and durable.
- Suitable for door, windows, wardrobe, cabinets, bathroom, bedroom, and apartments.
- Perfect for a variety of doors, cabinets, windows, drawers, lockers, pet gates, tool boxes and much more.
- Available finishes; chrome, black japan and brass plated.

## HASP AND STAPLE



FAS9460 BRASSPLATED 55MM P/1  
 FAS9470 BRASSPLATED 90MM P/1  
 FAS9475 BRASSPLATED 115MM P/1  
 FAS9480 BRASSPLATED 150MM P/1  
 FAS9435 E/GALV 55MM P/1  
 FAS9440 E/GALV 75MM P/1  
 FAS9445 E/GALV 90MM P/1  
 FAS9455 E/GALV 150MM P/1  
 FAS9410 B/J 55MM P/1  
 FAS9415 B/J 75MM P/1  
 FAS9420 B/J 90MM P/1  
 FAS9425 B/J 115MM P/1

- Hasp and staple with concealed fixings to ensure extra security and long-lasting performance.
- Flexible swinging hasp with smooth latching action, allows you to open and close the latch easily.
- Versatile door clasp, suitable for both 180 degree and 90 degree installation.
- Perfect for a variety of doors, cabinets, windows, drawers, lockers, pet gates, tool boxes and much more.
- Finishes available; electro galvanised, black japan and brass plated.

## PAD BOLT



FAS9115 GALV 150MM P/1  
 FAS9125 GALV 100MM P/1  
 FAS9120 OVAL GALV 100MM P/1

- The pad bolt is a popular method for securing your valuable products or equipment, preventing them from being stolen or damaged. Ideal for extra security on garage doors, sheds and gates.
- We recommend a pad bolt for any medium to heavy-duty applications, including garden gate security.
- A padlock can be attached to the pad bolt.
- Easy to fit to any surface, these mild steel (confirm coating) strong bolts are manufactured with a high quality powder coated finish.

## NECKED BARREL BOLT/PAD



|         |                     |
|---------|---------------------|
| FAS9315 | NECKED CP 50MM P/1  |
| FAS9320 | NECKED CP 75MM P/1  |
| FAS9325 | NECKED CP 100MM P/1 |
| FAS9330 | NECKED BP 50MM P/1  |
| FAS9335 | NECKED BP 75MM P/1  |
| FAS9340 | NECKED BP 100MM P/1 |
| FAS9100 | GALV 75MM P/1       |
| FAS9105 | GALV 100MM P/1      |
| FAS9085 | B/J 75MM P/1        |

- Perfect solution for additional home security.
- Simple to use but highly effective and can be used on any door or window in the house.
- Depending on the application where a necked bolt may be unsuitable, then a straight barrel bolt can be used.
- Available finishes; chrome, black japan and brass plated.

## BALL CHAIN/BALL CHAIN JOINER



|         |                              |
|---------|------------------------------|
| FAS9000 | 3.2MM X 1M CHROME PLATED     |
| FAS9005 | 3.2MM X 1M BRASS PLATED      |
| FAS9010 | 3.2MM P/5 BALL JOINER CHROME |

### Ball chain

- Durable with a uniform size.
- Smooth surface and comfortable grip.
- Adjustable length: The length of a ball chain is adjustable, just use scissors to cut between the balls to meet your required needs and to add matching connectors.
- Wide application: can be used for jewellery making, necklace hanging, dog tags, DIY crafts, and many other applications.
- Available finishes; brass plated and chrome plated.

### Ball chain joiner

- Easy to connect with the metal ball chain.
- Available finishes; brass plated and chrome plated.
- Can use this for all of your home decoration ball chains, such as window blinds ball chain, light chain or the fans chain, this is suitable for 4.5mm diameter of ball chain.
- Ball chain joiner finish; chrome.


## CHAIN TWIST LINK



|         |          |
|---------|----------|
| FAS9025 | 2MM X 1M |
| FAS9030 | 3MM X 1M |

- Easy to separate according to the length you require.
- Easy to use, store and carry.
- Suitable and perfect for jewellery crafts such as bracelets, earring tassels, necklaces, key chains, handbag chains, anklets, choker and even decorations on clothes or in the house.

## BALL BEARING HINGE



|         |             |
|---------|-------------|
| FAS9405 | S/STEEL P/2 |
|---------|-------------|

- Easy to separate according to the length you require.
- Easy to use, store and carry.
- Suitable and perfect for jewellery crafts such as bracelets, earring tassels, necklaces, key chains, handbag chains, anklets, choker and even decorations on clothes or in the house.

## TEE HINGE



|         |                |
|---------|----------------|
| FAS9375 | B/J 100MM P/2  |
| FAS9380 | B/J 150MM P/2  |
| FAS9390 | GALV 100MM P/2 |
| FAS9395 | GALV 150MM P/2 |

- Easy to install.
- Wide application; T Strap Hinges are usually used for indoors and outdoors, ideal for door sheds, playhouse, gates, yard doors, garden doors, wooden vinyl fence, storage barn sheds and more.
- Maximum rotation angle is up to 270 degrees.
- The shaft of the T hinges ensures the door runs smoothly and reduce noise.

## BACK FLAP HINGE



|         |          |
|---------|----------|
| FAS9305 | 38MM P2  |
| FAS9310 | 50MM P/2 |

- Easy to separate according to the length you require.
- Easy to use, store and carry.
- Suitable and perfect for jewellery crafts such as bracelets, earring tassels, necklaces, key chains, handbag chains, anklets, choker and even decorations on clothes or in the house.

## BUTT HINGE



|         |                        |
|---------|------------------------|
| FAS9240 | STEEL 25MM P/2         |
| FAS9245 | STEEL 40MM P/2         |
| FAS9250 | STEEL 50MM P/2         |
| FAS9255 | STEEL 65MM P/2         |
| FAS9260 | STEEL 75MM P/2         |
| FAS9265 | STEEL 100MM P/2        |
| FAS9270 | STEEL 100MM L/PIN P/2  |
| FAS9275 | BRASS PLATED 25MM P/2  |
| FAS9280 | BRASS PLATED 40MM P/2  |
| FAS9285 | BRASS PLATED 50MM P/2  |
| FAS9290 | BRASS PLATED 65MM P/2  |
| FAS9295 | BRASS PLATED 75MM P/2  |
| FAS9300 | BRASS PLATED 100MM P/2 |

- Functional, effective, and designed with convenience in mind with its water-resistant construction.
- Pre-lubricated pins to prevent squeaking.
- Can be used on left or right-handed doors.
- Use on doors, boxes, cabinets, and furniture where there is a desire to remove the hinge pin at a later time.
- Includes mounting screws for simple installation and a removable pin to remove the door without unscrewing the hinge.
- Available finishes; steel and brass plated.

## SINKLESS HINGE



|         |                 |
|---------|-----------------|
| FAS9200 | STEEL 50MM P/2  |
| FAS9205 | STEEL 65MM P/2  |
| FAS9210 | STEEL 75MM P/2  |
| FAS9215 | STEEL 100MM P/2 |
| FAS9220 | BRASS 50MM P/2  |
| FAS9225 | BRASS 65MM P/2  |
| FAS9230 | BRASS 75MM P/2  |
| FAS9235 | BRASS 100MM P/2 |

- Easy to install.
- Smooth sliding bearing hinge can rotate up to 360°, and not easy to jam or stagnate.
- Suitable for doors, cabinets, windows, wooden boxes, cupboard, dresser etc.
- Available finishes; steel and brass.

## BUTTERFLY HINGE



|         |                   |
|---------|-------------------|
| FAS9160 | 65MM STEELPIN P/2 |
|---------|-------------------|

- Ideal for use on steel gates.
- They're both functional and well designed.
- Attach these hinges to steel gates by welding them on.

## BRACKET THRU



FAS9495 19MM P/1

- Multiple uses; suits for closet, bathroom, window, wardrobe, balcony, clothes shop, laundry rooms to store or hanging towels, clothing, ties and other objects.
- Application: set it between two brackets on the wall top, installing indoor curtains, inside a closet, bathroom, window, laundry rooms.
- Sturdy and durable.

## FLANGE BRACKET



FAS9490 19MM P/2

- Multiple uses; in wardrobes, closets, balconies, bathrooms, bedrooms, kitchens, etc.
- The side of the tube is adjustable with screws, pack does include mounting screws.
- Sturdy and durable.
- Easy to install.

## HASP AND STAPLE



FAS9490 19MM P/2

- Flexible swinging hasp with smooth latching action, allows you to open and close the latch easily
- Versatile door clasp with high quality mounting hardware suitable for both 180 degree and 90 degree installations.
- Perfect for a variety of doors, cabinets, windows, drawers, lockers, pet gates, tool boxes and much more.
- Includes mounting screws.
- Available finishes; electro galvanised, black japan and brass plated.

## TEE BRACE



FAS9190 GALV 75MMX75MM P/2  
FAS9195 GALV 100MMX100MM P/2

- T shape flat angle bracket design allows for quick and easy repair.
- Stable, and durable.
- Application; widely used in homes, offices, and factory fields for tables, desks; reinforced broom closet doors, flat seams, and cracks.
- Consolidate your bed frame, box, chest, and furniture construction or repair.


## GATE LATCH



FAS9180 B/J P/1  
FAS9185 GALV B/J P/1

- For flush mounted gates and doors where self-locking action is desired.
- Ideal for fence gates or shed doors.
- Self-closing latch for easy release from either side of the gate.
- Strong and sturdy.
- Easy to install with screws included.
- Available finishes; black japan and galvanised.

## CORNER BRACE



FAS9165 IRON 50MMX50MM P/2  
FAS9170 IRON 75MMX75MM P/2  
FAS9175 IRON 100MMX100MM P/2

- Use to reinforce or add a decorating quality to woodworking projects.
- Available finish; iron.
- Great for interior DIY projects and other small projects.
- Tools required: marking pencil, power drill, hand held drill, and drill bit.
- Corner braces have pre-drilled holes that make installation easy and ensure a flush mount.

### CORNER BRACKET



|         |                    |
|---------|--------------------|
| FAS9135 | GALV 25MMX25MM P/2 |
| FAS9140 | GALV 50MMX50MM P/2 |
| FAS9145 | GALV 63MMX63MM P/2 |
| FAS9150 | GALV 75MMX75MM P/2 |

- Ideal for quickly and easily repairing wood furniture.
- Connecting furniture joint corner board and reducing the disturbance of objects shaking.
- DIY your furniture, such as a bookshelf, cabinet, table, wardrobe, and desk chair.
- Widely used in the homes, hotels, restaurants, workshop, storage rooms, factory areas and so on.
- Easy to install; the shelf brackets only need to be screwed on.
- Screws not included.
- Available finish; galvanised.







**NOTES**

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---





# Fascor®

## FASCOR FASTENERS CATALOGUE 2024



### JOHANNESBURG

Number 1 Randport  
Industrial Park, 1 Suzuka Road,  
Gosforth Park, Germiston  
T 011 681 9440 (Admin)  
T 011 681 9100 (Sales)  
E [info@matus.co.za](mailto:info@matus.co.za)  
W [www.matus.co.za](http://www.matus.co.za)

### CAPE TOWN

11 Grenville Ave,  
Epping Industria 1,  
Cape Town  
T 021 486 2200  
E [info@matus.co.za](mailto:info@matus.co.za)

### CAPE TOWN

Physical Address  
Unit B, Campbell Street,  
Northfield Business Park  
Glen Anil, 4051  
T 031 580 3400  
E [info@matus.co.za](mailto:info@matus.co.za)

### PORT ELIZABETH

Physical Address  
118 Burman Road,  
Deal Party, Port Elizabeth  
T 041 486 1345/59  
E [info@matus.co.za](mailto:info@matus.co.za)



**MATUS**  
Hard Working Brands